

Color Box Camera



MTC-8382

SPECIFICATIONS



MTC-8382

1/3" Hi-Res. Color Camera
 SONY Super HAD CCD / 480TVL
 Mechanical Focus Adjustment
 Minimum Illumination: 0.15Lux@F1.2
 AES/AGC/BLC/Flickerless switch
 Dual Voltage (24Vac/12Vdc, 90~260Vac)
 Line Lock

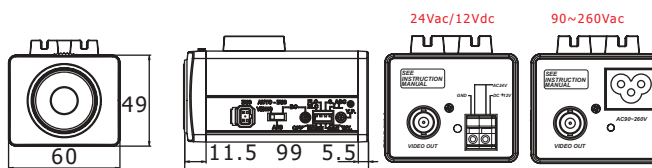

Tol: ± 0.5 Unit:mm

DIMENSIONS

| MTC-8382 | |
|-------------------------------|---|
| TV System | PAL NTSC |
| Lens Mount | CS mount |
| Synchronizing System | 1/3" SONY SUPER HAD CCD |
| Number of Total Pixels | 795(H)x596(V) 811(H)x508(V) |
| Video Output | 1.0Vp-p/ 75 Ω |
| Resolution | 480TVL |
| Minimum Illumination | 0.15Lux@F1.0 |
| Signal to Noise Ratio | More than 50dB(AGC Off) |
| Gamma Correction | 0.45 |
| Synchronizing System | Internal/Line Lock (AC Version Only) |
| Iris Control | Video/DC |
| Electronic Shutter Speed Mode | AES ON: 1/50 (60)Sec. ~1/100,000Sec. AES OFF: 1/50(60)Sec. |
| Auto White Balance | Automatic |
| Auto IRIS Output | Video/DC (Switchable) |
| Switch | Auto IRIS Mode: DC/ Video Synchronizing System: Internal/Line Lock (L.L) Back Light Compensation: ON/ OFF Auto Gain Control: AGC/S.AGC Flickerless Control: ON/ OFF |
| Adjustment VR | L.L V-phase; DC Level |
| Power Supply | 12Vdc/24Vac ; 90~260Vac |
| Power Consumption | 12Vdc/24Vac: 3.5W ; 90~260Vac: 4.5W |
| RoHS | Yes |
| Operation Temperature | -10°C~50°C |
| Operation Humidity | Maximum: RH80% |
| Storage Temperature | -20°C~60°C |
| Storage Humidity | Maximum: RH90% |
| Dimensions | 60(W)x49(H)x99(D)mm |
| Weight | 12Vdc/24Vac: 250g ; 90~260Vac: 300g |