

MPEG-4 IP Camera

WTC-8342HQ, WTC-8342

SPECIFICATIONS




new WTC-8342HQ

MPEG4 ASP Compression
Resolution up to Full D1
SONY HQ1/ 550TVL
0.15Lux@F1.0



WTC-8342

MPEG-4 ASP Compression
Resolution up to Full D1

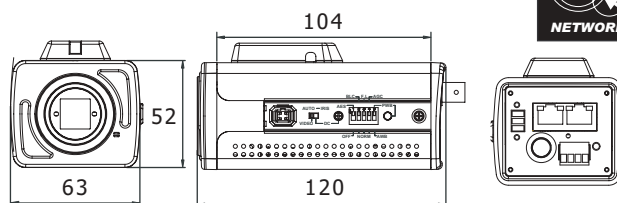

Tol: ± 0.5 Unit:mm

DIMENSIONS

		WTC-8342HQ		WTC-8342	
		PAL	NTSC	PAL	NTSC
Image System	TV System	1/3" SONY Super HAD CCD			
	Effective Pixels(H x V)	795(H) x 596(V)	811(H) x 508(V)	795(H) x 596(V)	811(H) x 508(V)
	Resolution	540TVL		480TVL	
	Synchronizing System	Internal			
	Minimum Illumination	0.15Lux @ F1.0		0.15Lux @ F1.2	
	Electronic Shutter	AES On: 1/50 (60) sec. ~ 1/100,000 sec; AES Off: 1/50 (60) sec.			
	Back Light Compensation	ON/ OFF (Switchable)			
	Auto Gain Control	ON/ OFF (Switchable)			
	Flicker Less	ON/ OFF (Switchable)			
	Auto IRIS Control	Video / DC (Switchable)			
	Auto White Balance	AWB		AWB(ATW)/PWB	
	Signal to Noise Ratio	More than 50dB (AGC off)			
	Compression	Video Output	1Vp-p Composite/75Ω		
Lens Mount		C/CS (With Adaptor)			
Image Compression		MPEG-4 ASP			
Network	Image Frame Rate	25 fps @ 720x576	30 fps @ 720x480	25 fps @ 720x576	30 fps @ 720x480
	Max Resolution	Full D1 / CIF / QCIF			
	Ethernet	10/100 base-T for LAN/WAN			
I/O Connector	Supported Protocol	TCP/IP, HTTP, ARP, PPPoE, DDNS, DHCP, RTP/RTSP, IGMP			
	QoS	Layer 2, 3			
	Network	2xRJ-45 (WAN/LAN)			
Software	Analog Video Output	1xComposite (BNC)			
	Serial Port	1xRJ-45 port (RS485)			
	DI/O	1xDI ;1xDO			
Software OS Support	Win 2000, Win XP, / 16Ch AP				
Watchdog Timer	5 sec.				
Security	User authorization for accessing camera				
Operation Temperature	-10°C ~ 50°C				
Operation Humidity	RH85% or less				
Storage Temperature	- 20°C ~ 60°C				
Power Supply	12Vdc				
Power Consumption	9.0W				
Dimensions	63(W)x52(H)x120(L) mm / 2.17(W)x1.85(H)x4.13(L) inch				
Weight	600g				