

MPEG-4 IP Camera



WTC-8342S

SPECIFICATIONS



WTC-8342S

MPEG-4 ASP Compression
1/3" Hi-Res./480TVL
0.15Lux@F1.2

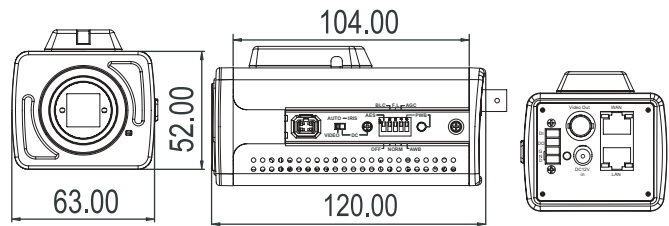

Tol: ± 0.5 Unit:mm

DIMENSIONS

| | | WTC-8342S | |
|-----------------------|--|---|------------------|
| | | PAL | NTSC |
| Image System | TV System | 1/3" SONY Color CCD | |
| | Effective Pixels(H x V) | 795(H) x 596(V) | 811(H) x 508(V) |
| | Resolution | 480TVL | |
| | Synchronizing System | Internal | |
| | Minimum Illumination | 0.15Lux @ F1.2 | |
| | Electronic Shutter | AES On: 1/50 (60) sec. ~ 1/100,000 sec; AES Off: 1/50 (60) sec. | |
| | Back Light Compensation | ON/ OFF (Switchable) | |
| | Auto Gain Control | ON/ OFF (Switchable) | |
| | Flicker Less | ON/ OFF (Switchable) | |
| | Auto IRIS Control | Video / DC (Switchable) | |
| | Auto White Balance | AWB(ATW)/PWB | |
| | Signal to Noise Ratio | More than 50dB (AGC off) | |
| | Video Output | 1Vp-p Composite/75Ω | |
| | Lens Mount | C/CS (With Adaptor) | |
| Compression | Image Compression | MPEG-4 ASP | |
| | Image Frame Rate | 25 fps @ 352x288 | 25 fps @ 352x240 |
| | Max Resolution | CIF / QCIF | |
| Network | Ethernet | 10/100 base-T for LAN/WAN | |
| | Supported Protocol | TCP/IP, HTTP, ARP, PPPoE, DDNS, DHCP, RTP/RTSP,IGMP | |
| | QoS | Layer 2, 3 | |
| I/O Connector | Network | 2xRJ-45 (WAN/LAN) | |
| | Analog Video Output | 1xComposite (BNC) | |
| | Serial Port | 1xRJ-45 port (RS485) | |
| | DI/O | 1xDI ;1xDO | |
| Software OS Support | Win 2000, Win XP, / 16Ch AP | | |
| Watchdog Timer | 5 sec. | | |
| Security | User authorization for accessing camera | | |
| Operation Temperature | -10°C ~ 50°C | | |
| Operation Humidity | RH85% or less | | |
| Storage Temperature | - 20°C ~ 60°C | | |
| Power Supply | 12Vdc | | |
| Power Consumption | 9.0W | | |
| Dimensions | 63(W)x52(H)x120(L) mm / 2.17(W)x1.85(H)x4.13(L) inch | | |
| Weight | 600g | | |